



# BOSSTAB Edge Evo Screw Mount (From Above)


## Getting started guide




1. Lift base casing from the base plate.




2. Drill pilot holes to assist with screw base mounting. Refer to the mounting guide for assistance.

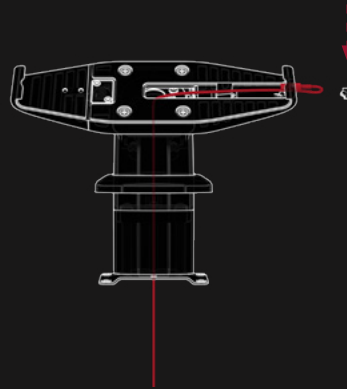


3. If you are running your charging cable through the surface, remove the cable clip and ensure to drill a larger hole to feed cable through.

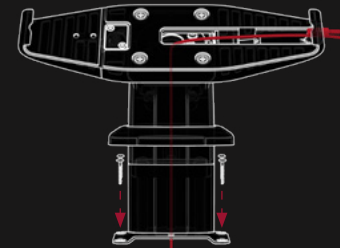


4. Screw down your stand through the base plate using the wood screws provided.

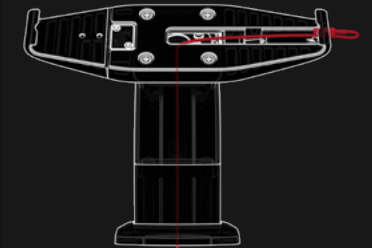


5. Press down the base casing over the base plate.

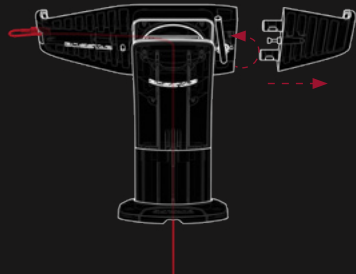


6. Unlock the security lock with the L shape key and slide the clamp out.

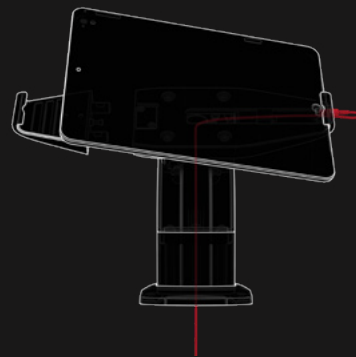

7. Plug in charging cable and squeeze the tablet into the clamp with the charging cable running behind the tablet.

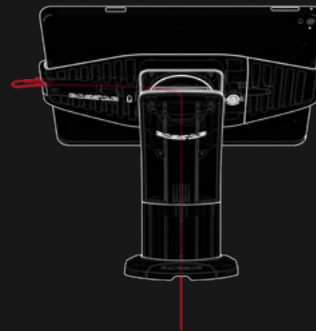

8. Re-attach the clamp arm by sliding in and squeezing tablet.

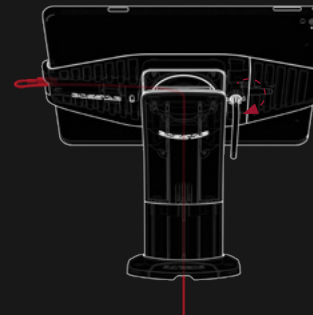

9. Remain holding clamp together until you have rotated the security lock with the L shape key into the lock position.

For more information or to contact our sales & customer support team please click on the links below:


[Contact Us](#)

[Warranty & Returns](#)


[Shipping](#)

# BOSSTAB Edge Evo Screw Mount (From Below)


## Getting started guide




1. Unscrew the three screws to remove the base plate and base casing.




2. Drill pilot holes to assist with screw base mounting. Refer to the mounting guide for assistance.




3. If you are running your charging cable through the surface, remove the cable clip and ensure to drill a larger hole to feed cable through.

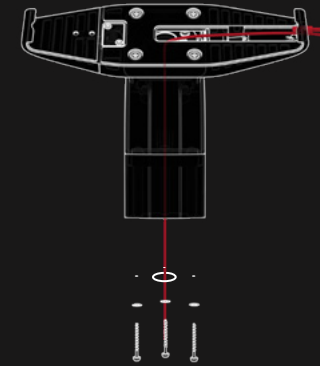


4. Screw down your stand through mounting surface using the screws and washers provided.

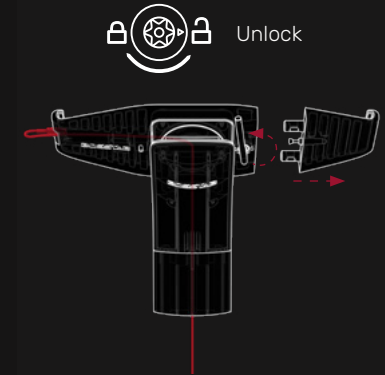


5. Unlock the security lock with the L shape key and slide the clamp out.

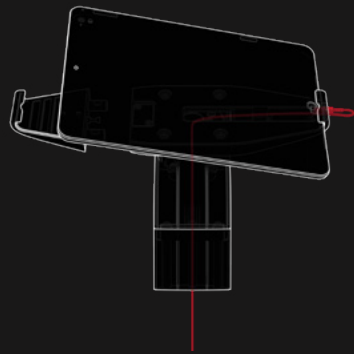

6. Plug in the charging cable and squeeze the tablet into the clamp with the charging cable running behind the tablet.



7. Re-attach the clamp arm by sliding in and squeezing tablet.

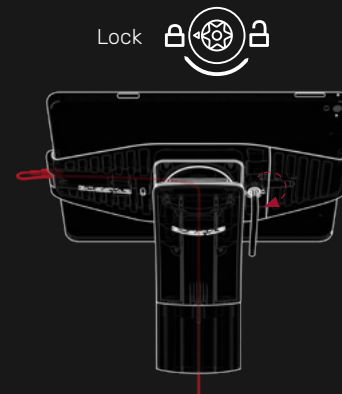

8. Remain holding clamp together until you have rotated the security lock with the L shape key into the lock position.

For more information or to contact our sales & customer support team please click on the links below:

[Contact Us](#)

[Warranty & Returns](#)

[Shipping](#)