






Please run necessary power cables required through the wall before starting.

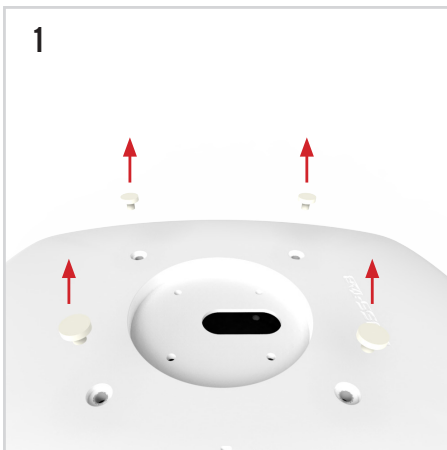

1 Remove the 4 rear rubber pads covering the Vesa mount holes on the case.

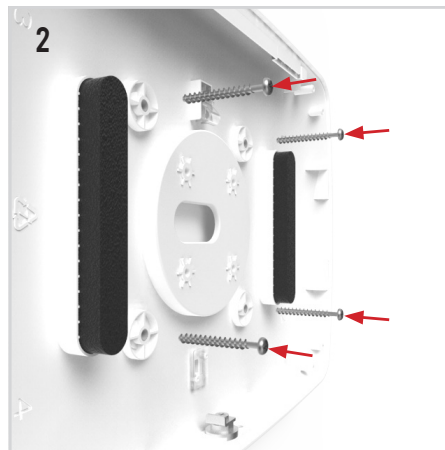

2 Screw the case to the mounting surface using the Vesa holes.*

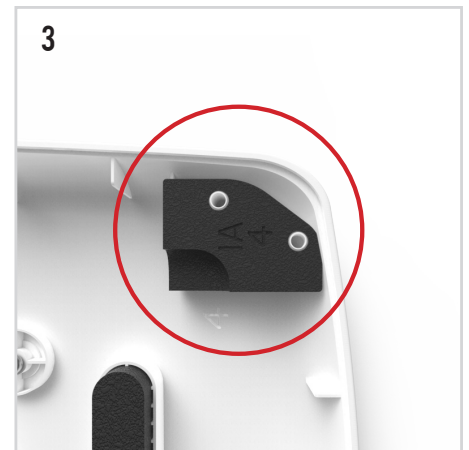

3 Place the required adapter pads onto the matching slots in the case, numbered 1-4.



4 Place the tablet into the case and plug in the power cable.



5 Install the faceplate and lock with the key provided.



6 Optional hex socket screw provided for added security.

*Screws are not included due to unique variations of mounting surfaces.